



H3S065A010, H3S065T010, H3S065U010

Features

- Low Conduction and Switching Loss
- Zero Reverse Recovery
- Temperature Independent Switching Behavior
- Positive Temperature Coefficient Device
- High Surge Current Capability
- RoHS Compliant and Halogen Free
- AEC-Q101 Qualified

Benefits

- Higher System Efficiency
- Increase Parallel Device Convenience
- Enable High Temperature Application
- Allow High Frequency Operation
- Realize Compact and Lightweight Systems
- High Reliability


Applications

- Switching Mode Power Supply
- PFC
- UPS
- Motor Drives
- Flywheel diode in Power Inverters
- Solar/Wind Renewable Energy

V_R 650V
 $I_{F(135/151^\circ C)}$ 14A/10A
 Q_C 27nC



Circuit Diagram

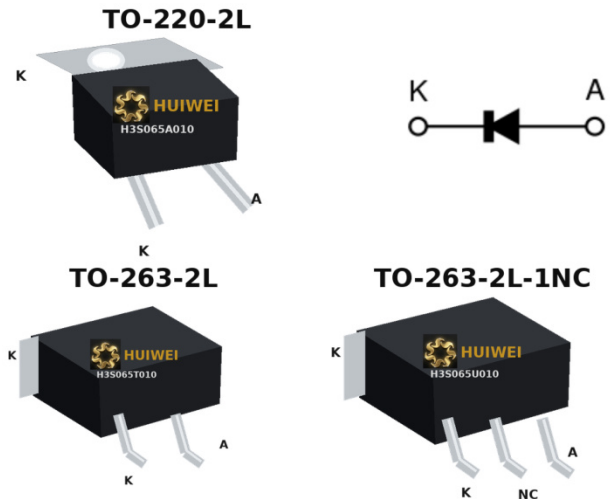

Part Number	Package	Marking
H3S065A010	TO-220-2L	H3S065A010
H3S065T010	TO-263-2L	H3S065T010
H3S065U010	TO-263-2L-1NC	H3S065U010

Absolute Maximum Ratings ($T_c = 25^\circ C$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Value	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	$T_J = 25^\circ C$	650	V
Peak Reverse Surge Voltage	V_{RSM}	$T_J = 25^\circ C$	650	V
DC Blocking Voltage	V_R	$T_J = 25^\circ C$	650	V
Continuous Forward Current	I_F	$T_C = 25^\circ C$	31	A
		$T_C = 135^\circ C$	14	
		$T_C = 151^\circ C$	10	
Non-Repetitive Peak Forward Surge Current	I_{FSM}	$T_C = 25^\circ C, T_P = 10 \text{ ms, Half Sine Wave}$	72	A
		$T_C = 125^\circ C, T_P = 10 \text{ ms, Half Sine Wave}$	67	
		$T_C = 25^\circ C, T_P = 10 \mu s, \text{ Pulse}$	569	
Repetitive Peak Forward Surge Current	I_{FRM}	$T_C = 25^\circ C, T_P = 10 \text{ ms, Half Sine Wave, } D = 0.1$	58	A
		$T_C = 125^\circ C, T_P = 10 \text{ ms, Half Sine Wave, } D = 0.1$	51	
Power Dissipation	P_D	$T_C = 25^\circ C$	107	W
		$T_C = 125^\circ C$	35	
I^2t value	$\int i^2 dt$	$T_C = 25^\circ C, T_P = 10 \text{ ms}$	26	A^2s
Junction & Storage Temperature	T_J, T_{stg}		-55 to 175	$^\circ C$
Soldering Temperature	T_L		260	
Mounting Torque	M_D	M3 or 6-32 screw	1.0	Nm



Electrical Characteristics (T_c = 25°C unless otherwise specified)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
DC Blocking Voltage	V _{DC}	I _R = 100 μA, T _J = 25°C	> 650			V
Forward Voltage	V _F	I _F = 10A, T _J = 25°C		1.45	1.7	V
		I _F = 10A, T _J = 175°C		1.65	1.9	V
Reverse Current	I _R	V _R = 650V, T _J = 25°C		1.5	75	μA
		V _R = 650V, T _J = 175°C		20	300	μA
Total Capacitive Charge	Q _C	I _F = 10A, dI/dt = 300A/μs, V _R = 400V, T _J = 25°C		27		nC
Total Capacitance	C _j	V _R = 0.1V, T _J = 25°C, f = 1 MHz		576		pF
		V _R = 200V, T _J = 25°C, f = 1 MHz		56		pF
		V _R = 400V, T _J = 25°C, f = 1 MHz		45		pF
Capacitance Stored Energy	E _C	V _R = 400V		5.2		μJ

Thermal Resistance

Parameter	Symbol	Min.	Typ.	Max.	Unit
Thermal Resistance, Junction to Case	R _{θJC}		1.4		°C/W

Naming Rule

H3 S 065 A 010

Generation

H3 = 3rd Gen Discrete

Device Type

S = JBS diode (High Power) D = JBS diode (High Speed)

Breakdown Voltage

065 = 650V 120 = 1200V 170 = 1700V

Package


A = TO-220-2L T = TO-263-2L U = TO-263-2L-1NC

Typical Current Rating


002 = 2A 004 = 4A 006 = 6A 008 = 8A 010 = 10A 015 = 15A

Recommended Solder Pad Layout

TO-220-2L

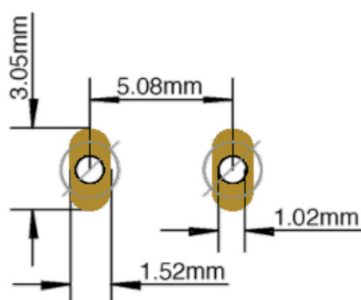

TO-263-2L, TO-263-2L-1NC

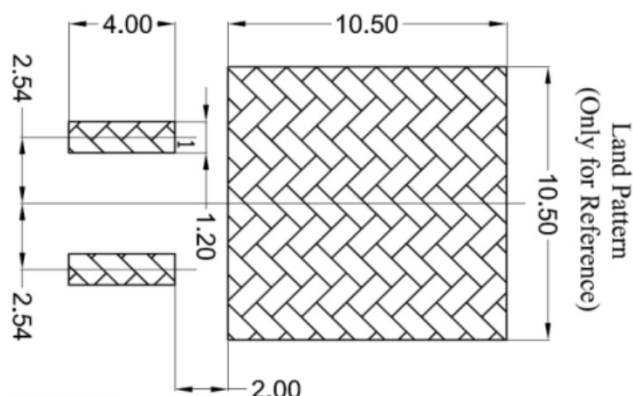



Typical Device Performance

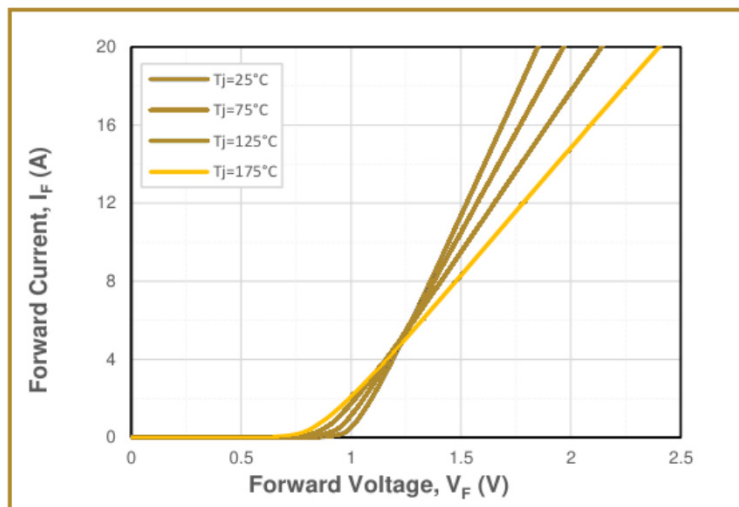


Fig.1 Forward Characteristics

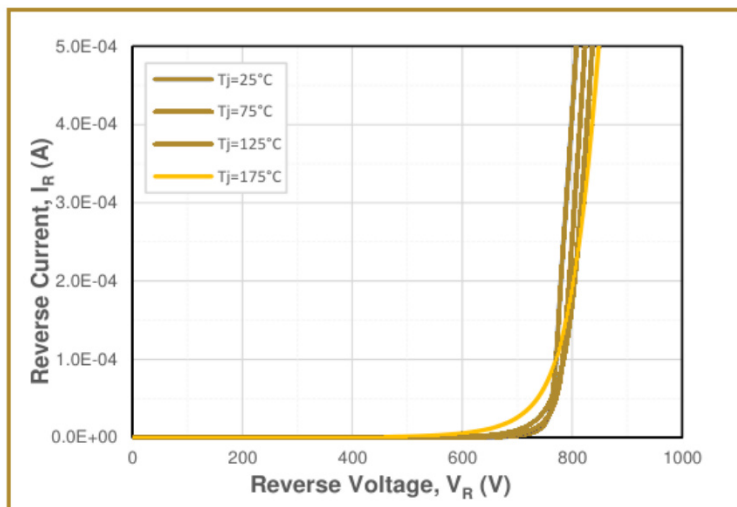


Fig.2 Reverse Characteristics

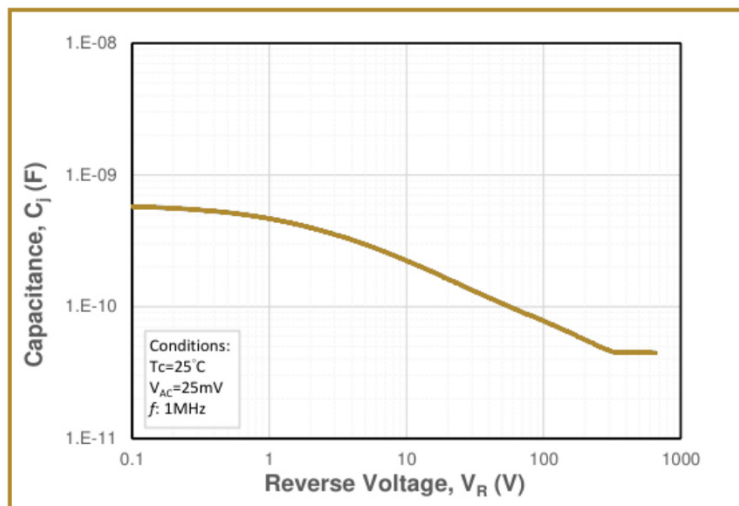


Fig.3 Junction Capacitance vs. Reverse Voltage

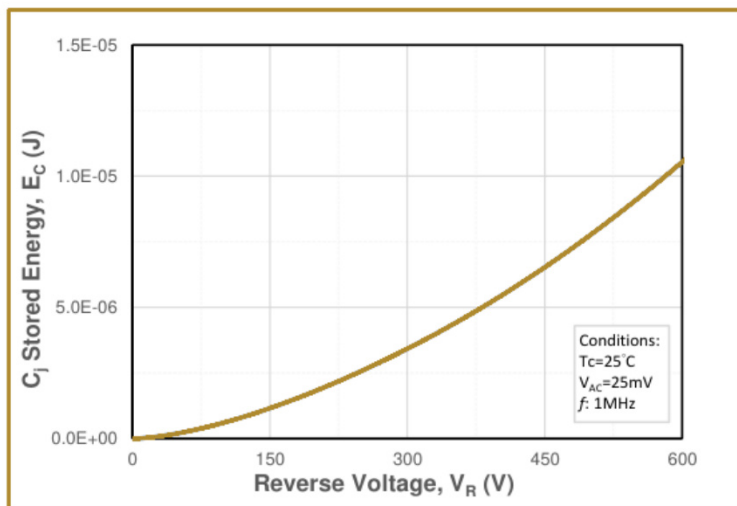


Fig.4 Capacitance Stored Energy

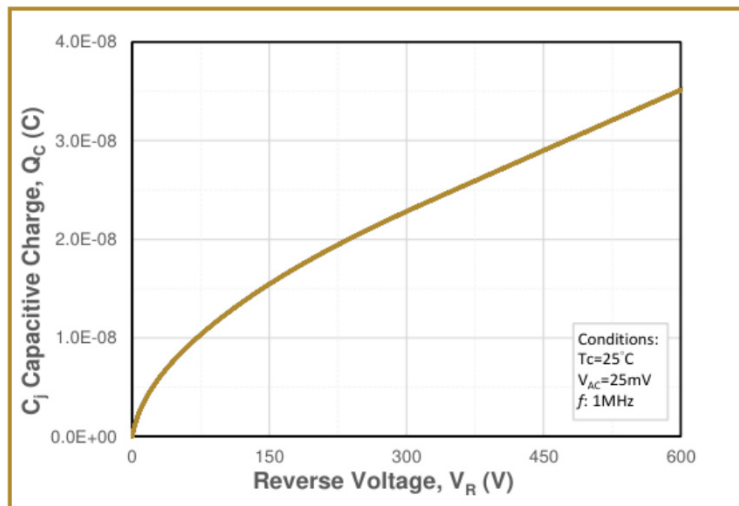


Fig.5 Recovery Charge vs. Reverse Voltage

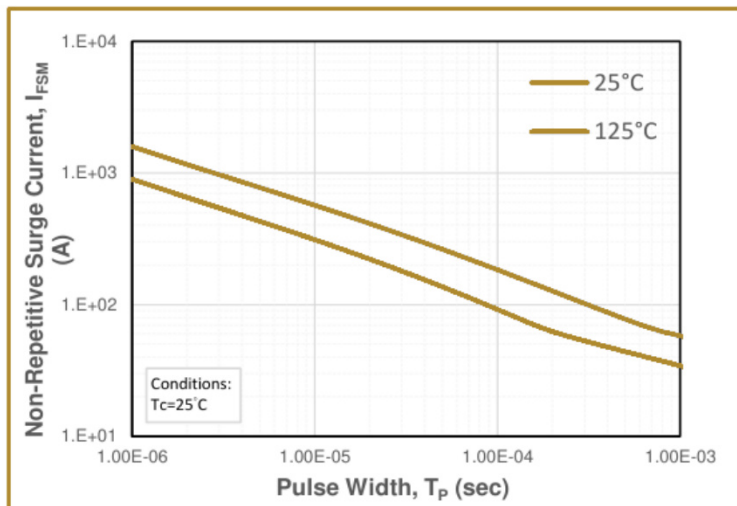


Fig.6 Non-Repetitive Peak Forward Surge Current (Pulse Mode)



Typical Device Performance

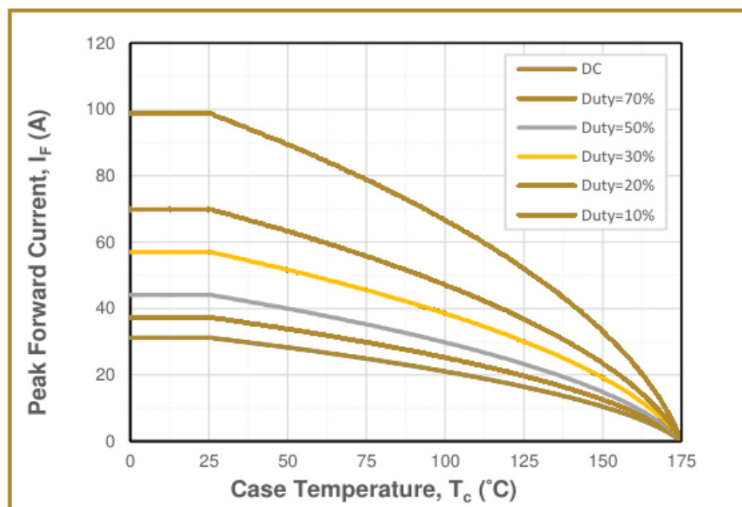


Fig.7 Maximum Forward Current Derating vs. Case Temperature

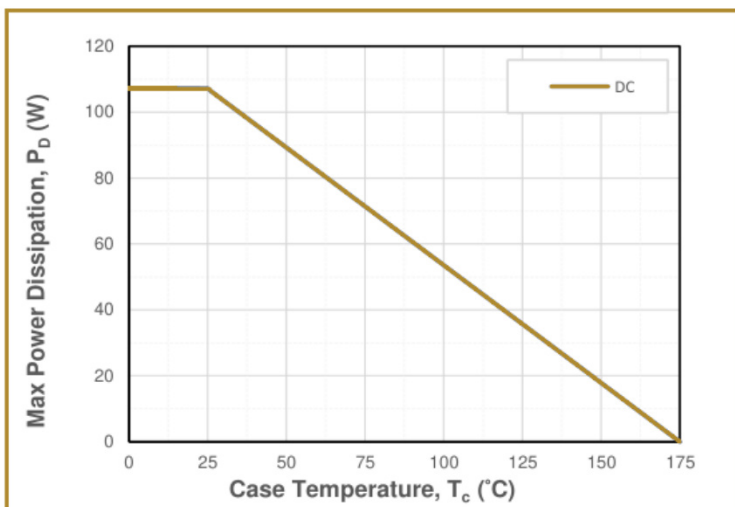


Fig.8 Maximum Power Dissipation Derating vs. Case Temperature


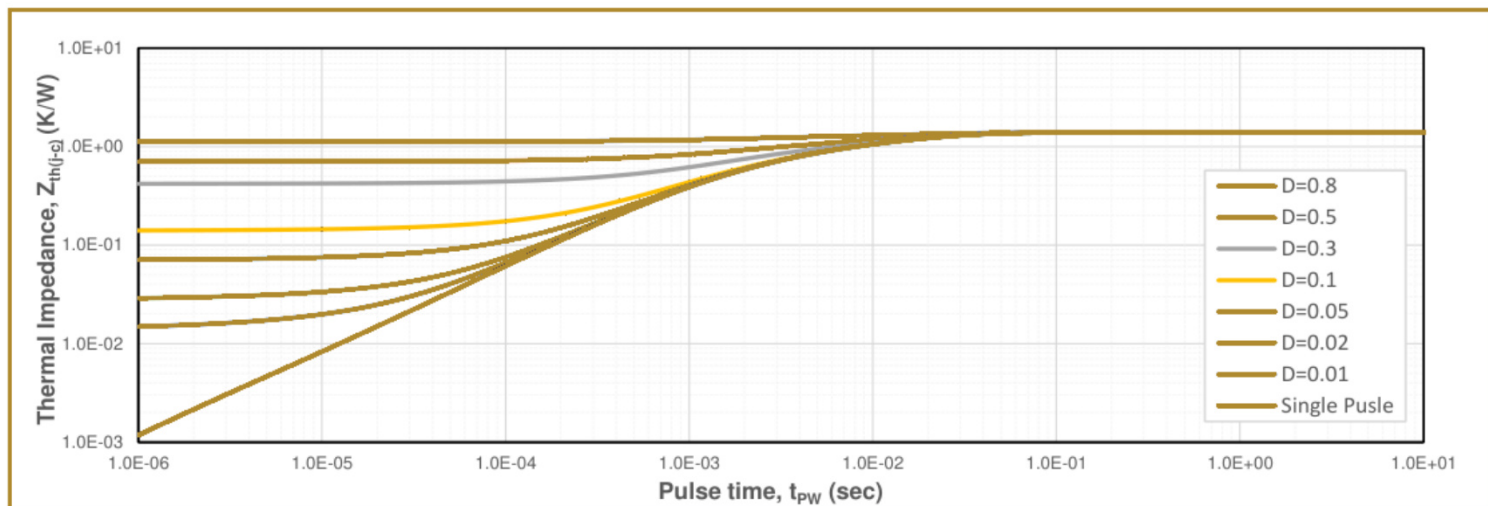


Fig.9 Transient Junction to Case Thermal Impedance

The information provided herein is subject to change without notice.



Package Dimensions (TO-220-2L)

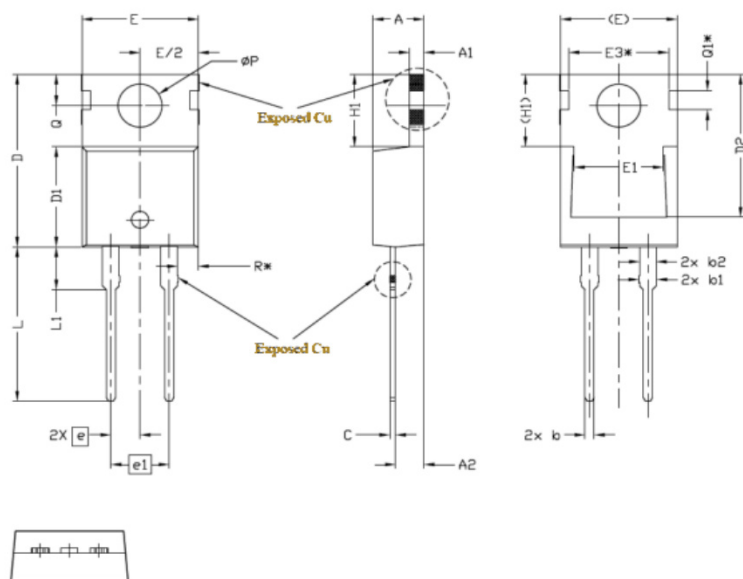


Note:

1. Package Reference: JEDEC TO220, Variation AB.
2. All Dimensions Are In mm.
3. Slot Required, Notch May Be Rounded.
4. Dimension D & E Do Not Include Mold Flash. Mold Flash Shall Not Exceed 0.127mm Pre Side. These Dimensions Are Measured At The Outermost Extreme Of The Plastic Body.
5. Thermal Pad Contour Optional Within Dimensions E, H1, D2 & E1.
6. Dimension E2 & H1 Define A Zone Where Stamping And Singulation Irregularities Are Allowed.
7. "*" is reference.

Symbol	mm		
	Min.	Typ.	Max.
A	4.24	4.44	4.64
A1	1.15	1.27	1.40
A2	2.30	2.48	2.70
b	0.70	0.80	0.90
b1	1.20	1.55	1.75
b2	1.20	1.45	1.70
c	0.40	0.50	0.60
D	14.70	15.37	16.00
D1	8.82	8.92	9.02
D2	12.63	12.73	12.83
E	9.96	10.16	10.36
E1	6.86	7.77	8.89
E3*	8.70 REF.		
e	2.54 BSC		
e1	5.08 BSC		
H1	6.30	6.45	6.60
L	13.47	13.72	13.97
L1	3.60	3.80	4.00
φP	3.75	3.84	3.93
Q	2.60	2.80	3.00
Q1*	1.73 REF.		
R*	1.82 REF.		

Package Dimensions (TO-263-2L, TO-263-2L-1NC)

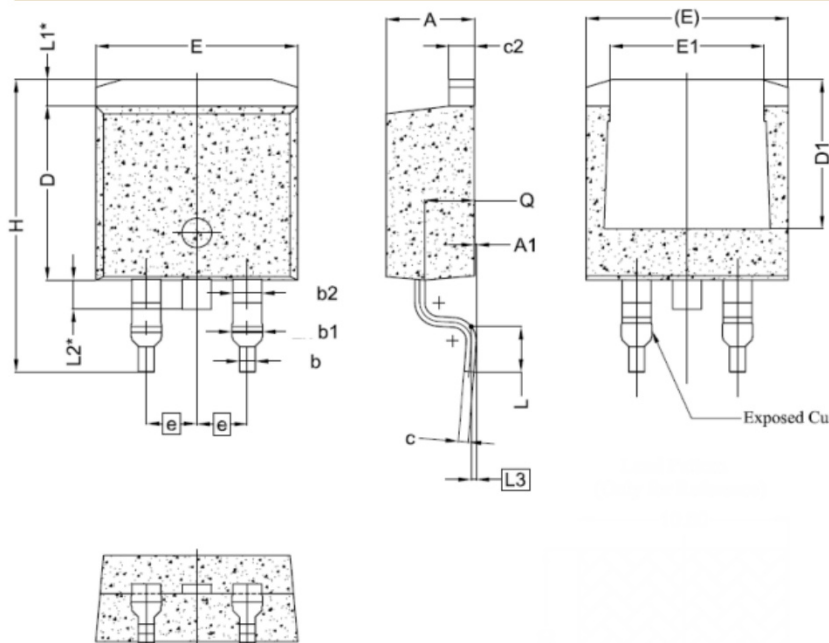

Note:

1. All Dimensions Are In mm.
2. Dimension D & E Do Not Include Mold Flash. Mold Flash Shall Not Exceed 0.127mm Pre Side. These Dimensions Are Measured At The Outermost Extreme Of The Plastic Body.
3. Thermal Pad Contour Optional Within Dimensions E, L1, D1 & E1.
4. Dimension D1 & E1 Establish A Minmum Mounting Surface for The Thermal Pad.
5. "*" is reference.

Symbol	mm		
	Min.	Typ.	Max.
A	4.24	4.44	4.64
A1	0.00	0.10	0.25
b	0.70	0.80	0.90
b1	1.20	1.55	1.75
b2	1.20	1.45	1.70
c	0.40	0.50	0.60
c2	1.15	1.27	1.40
D	8.82	8.92	9.02
D1	6.86	7.65	---
E	9.96	10.16	10.36
E1	6.89	7.77	7.89
e	2.54 BSC		
e1	5.08 BSC		
H	14.61	15.00	15.88
L	1.78	2.32	2.79
L1	1.36 REF		
L2	0.00 REF (TO-263-2L) 1.50 REF (TO-263-2L-1NC)		
L3	0.25 BSC		
Q	2.30	2.48	2.70